



The
Patent
Office

09/269518
PCT/GB 97/02940

The Patent Office
Concept House
Cardiff Road
Newport

South Wales
REC'D 13 JAN 1998
NP9 1RH
WIPO PCT

PRIORITY DOCUMENT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 1st December 1997

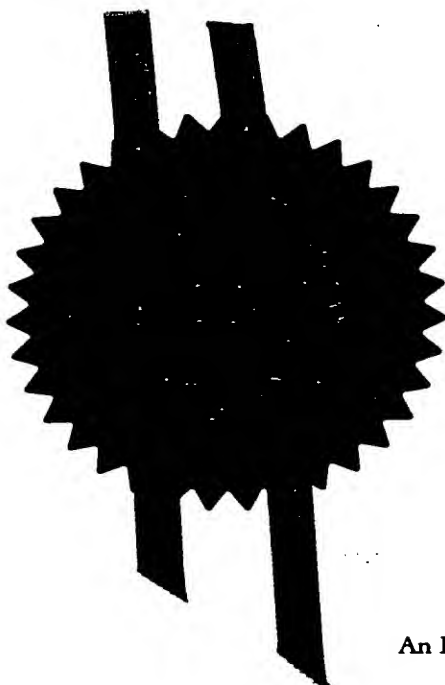

THIS PAGE BLANK (USPTO)

Pa 1977
(R)


The
Patent
Office

28 OCT 1996

28OCT96 E229844-5 D01038
P01/7700 25.00

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

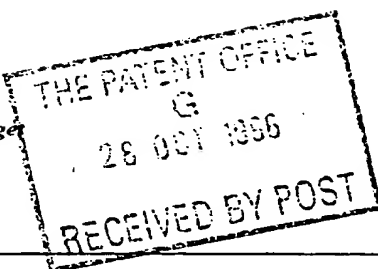

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference
BD/SAC/5-1-B

2. Patent application number
(The Patent Office will fill in this part)

9622361.5

3. Full name, address and postcode of the or of each applicant (underline all surnames)

ELTA FANS LIMITED

15 Barnes Wallis Road
Segensworth East Industrial Estate
Fareham
Hampshire
PO15 5ST

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

GB

4. Title of the invention

IMPROVEMENTS RELATING TO FANS

5. Name of your agent (if you have one)

WITHERS & ROGERS

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

4 Dyer's Buildings
Holborn
LONDON
EC1N 2JT

Patents ADP number (if you know it)

00001776001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

GB

9620633.9

03/10/96

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 6

Claim(s) 2

Abstract 1

Drawing(s) 2

10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (Patents Form 7/77) -

Request for preliminary examination and search (Patents Form 9/77) -

Request for substantive examination (Patents Form 10/77) -

Any other documents (please specify) -

11. I/We request the grant of a patent on the basis of this application.

Signature

Date 22/10/96

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr. B.J.N. DEMPSTER - 0121 233 2997

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

IMPROVEMENTS RELATING TO FANS

Fan units are often manufactured and sold to stockists without the exact performance requirements of the eventual user being known. In such cases it is normal that when sold, the fan manufacturer ensures that as far as possible, the included motor has sufficient capacity so as to cover the fans operation over the entire published fan characteristic.

Generally axial fan units exhibit a "stall" or abrupt change in the slope of their performance characteristic when they reach their maximum attainable pressure value. Operation beyond (i.e. to the left) of this 'stall point' is not recommended because of the unstable nature of the airflow/pressure characteristic, its associated increase in sound level; and its effect on the mechanical integrity of the fan unit. However, the resulting power characteristic to the left of the 'stall point' is generally of declining value with any increase at very low flow (i.e. towards the 'shut off', or zero flow condition) back to the peak value attainable when operating in its stable characteristic.

The attained peak pressure of an axial fan is very much dependent on its tip speed (i.e. proportional to its rotation speed) and to that of the total tip chord or total width of the blades in the tip region.

One kind of fan with a large tip chord is the so called scimitar bladed fan. Another is the sickle bladed fan. The greater chord results in higher pressure generation being achieved at the same tip speed.

As these types are particularly useful for their extra pressure generation

capability over conventional axial impellers then it is important that the resulting power characteristic takes on a sensible and acceptable contour. It has been found from test work that very useful pressure developments can occur on these impellers with wide tip chord when placed within a ducted fan arrangement although hitherto at least scimitar fans have usually been ductless, i.e. they have been made as partition fans or table fans. The inventors have discovered that these large tip chord fans when used in ducted configurations exhibit a rapid increase in power when run under low flow conditions which is well in excess of the "normal" peak power experienced towards the higher flow conditions; such that powers can be as much as 150% of the normal peak power.

According to the invention fan blades extend from a hub provided with a deflector ring at the air delivery end of the rotational axis.

It has been found that by the introduction of the hub 'deflector ring' that this low flow power surge can be controlled with only marginal reduction of the achieved increased performance. This then can result in the normal motor sizing associated with the normal 'peak power' being safely made.

The presence of the hub deflector ring has been found not to seriously effect the throughput of the fan unit from any extra 'blockage effect'. What it does do is stop an increasing flow reversal back through the hub region of the blade, which increases as the main fan throughput is reduced.

The natural centrifugal flow components become more dominant as the main flow reduces this gives a useful increase in pressure attainment to the impeller, be it at the expense of power due to recirculation.

The hub deflector plate in the fan which can be of a flat, inclined or specially profiled section, controls the power to the designers requirement. Thus the hub deflector ring may help a cross-section which broadens, preferably increasingly, towards the air delivery end of the rotational axis.

The invention is not solely applicable to axial flow fans. It has been found experimentally to be useful in mixed flow fans. These have generally radially extending impeller blades like an axial fan, but the fan is designed so as to produce a flow characteristic including generally axial intake but with delivery from the fan including a centrifugal or any rate radially directed component. This may result from shaping of the hub and/or of the duct in which the blades rotate, or by using a shroud which is effectively equal to the duct section in which the blades rotate but which is rotatable with the blades. Additionally or alternatively the effect may be caused by the shape and/or location of the blades. In particular, the blades may have axes which lie in planes generally radial of the rotational axis, but which axes are inclined in that plane so as to be contained on the surface of an imaginary cone instead of lying in a plane normal to the axis of rotation.

It has been found that with mixed flow fans occurrences happen similar to the effect described above in relation to scimitar sickle bladed axial fans, especially when the mixed flow fan has a spherical hub and spherical shroud designed to accommodate at least adjustable pitch blades, that is to say ones which are rotatable about their individual axis to any of a range of positions to give different fan characteristic.

It has been found beneficial when designing such impellers for installations requiring either radial or axial airflow discharge that the tip shroud be relatively short in the rearward direction so as to allow the main airflow to

radially expand off the protruding blade tips when the installation allows. That is to say, the shroud has an axial length which is less than the developed axial length of the tip chord.

This flow benefit, when the mixed flow fan is installed in a roof unit, is also apparent when the impeller is run in a ducted configuration. However, in the latter the same increasing power phenomena at reduced flow as experienced in the axial fans is present. This can be overcome by the use of a flat, tapered or contoured hub deflector ring at the rear of the blade root, with little or no effect on the main flow achievement.

The roof of each fan blade may extend substantially to the outer edge of the deflector ring. The fan blade may include an extension adjacent to the hub in the air delivery direction. The extension may be triangular.

A typical application of the invention is now more particularly described with reference to the accompanying drawing wherein the sole figure is a sectional elevation view of a mixed flow fan. In the drawing the fan motor may be provided at the location 10 upstream of the fan, that is to say at the inlet end or alternatively at the location 12 which is at the downstream or the delivery end. The arrangement includes a fixed duct 14 providing the inlet and a portion which is substantially a continuation of the fixed duct but is a rotating shroud 16.

The blades are fixed to a hub structure 18 including a part spherical portion 20 and an outwardly flared hub deflector ring portion 22. The one curve may fair smoothly into the other as shown. The shroud 16 may also be part spherical and the centre of curvature of the part spherical area of the shroud and that of the hub 20 may be common.

A plurality of blades 24 are provided fixed at each end to the hub and shroud respectively. The inner and outer ends are shaped to make a close fit with the shroud and with the hub.

In the drawing, the blades are seen to conform closely to the hub including the portions of the blades extending over the hub deflector ring. In the drawing it appears that the blades do not fit closely against the shroud but this is due to the limitation of a two dimensional drawing and to the twist in each blade where the corners 30 and 32 are located at different circumferential positions in relation to the diametric section of the drawing. In practice a close fit is achieved at the shroud.

The blades may be adjustably mounted so that they can be turned about axis A. The portion of the blade end lying against a part spherical surface may have an appropriately shaped end edge which will always lie against a complementary part-spherical surface and hence can be made a close fit. However, in the case of the heel portion of the blade which lies against the hub deflector ring, this is not true, and in this area the blade has to be shaped so that it makes a perfect fit against the ring at an extreme position of twist and a progressively increasing less perfect fit i.e. clearance as the blade setting angle is decreased.

It will be noted that the shroud 16 extends over only a portion of the blade width so that the airflow from inlet to outlet can have a substantial radial direction at the outlet, which is particularly useful in the case of roof units which draw air axially from within the building or ducting and deliver it radially around the perimeter into a roof cowl and thence to atmosphere.

It will be noted that the blades have a somewhat triangular extension

36 fitting against the hub deflector ring and it is particularly important that the area 38 bounded by the broken line 40 joining the corner 30 with a corresponding corner of the extension 36 is not filled in. This shaping permits the driven air to escape from the fan without being caught up in a recirculatory flow leading to undesirable power absorption which would negate the purpose of the hub deflector ring.

CLAIMS

1. Again comprising fan blades extending from a hub provided with a deflector ring at the air delivery end of the rotational axis.
2. Again as claimed in Claim 1, wherein the hub deflector ring in the fan is of a cross section which broadens towards the air delivery end of the rotational axis.
3. Again as claimed in Claim 2, wherein the hub deflector ring is of a accrued cross-section becoming increasingly broad towards the air delivery end of the rotational axis.
4. Again as claimed in Claim 1, 2 or 3, wherein the form is an axial flow fan.
5. Again as claimed in Claim 1, 2 or 3, wherein the fan is a mixed flow fan.
6. Again as claimed in Claim 5, wherein the fan blades have axes which lie in planes generally radial of the rotational axis, but which axes are inclined in that plane so as to be contained on the surface of an imaginary cone instead of lying in a plane normal to the axis of rotation.
7. Again substantially as described herein with reference to the accompanying drawing the shroud has an axial length which is less than the developed axial length of the tip chord.
8. In Claim 5, 6 or 7 wherein the blades have adjustable pitch.


9. In Claim 8, wherein the mixed flow fan has a spherical hub.
10. In Claim 8 or 9 wherein the fan has a spherical shroud.
11. Again as claimed in any proceeding claim, wherein the roof of each fan blade extends substantially to the outer edge of the deflector ring.
12. Again in any proceeding claim, wherein each fan blade includes an extension adjacent the hub in the air delivery direction.
13. Again substantially as described herein with reference to the accompanying drawing.

ABSTRACT

Again comprises fan blades 24 extending from a hub 18 provided with a deflector ring 22 at the air delivery end of the rotational axis.

THIS PAGE BLANK (USPTO)

1
1

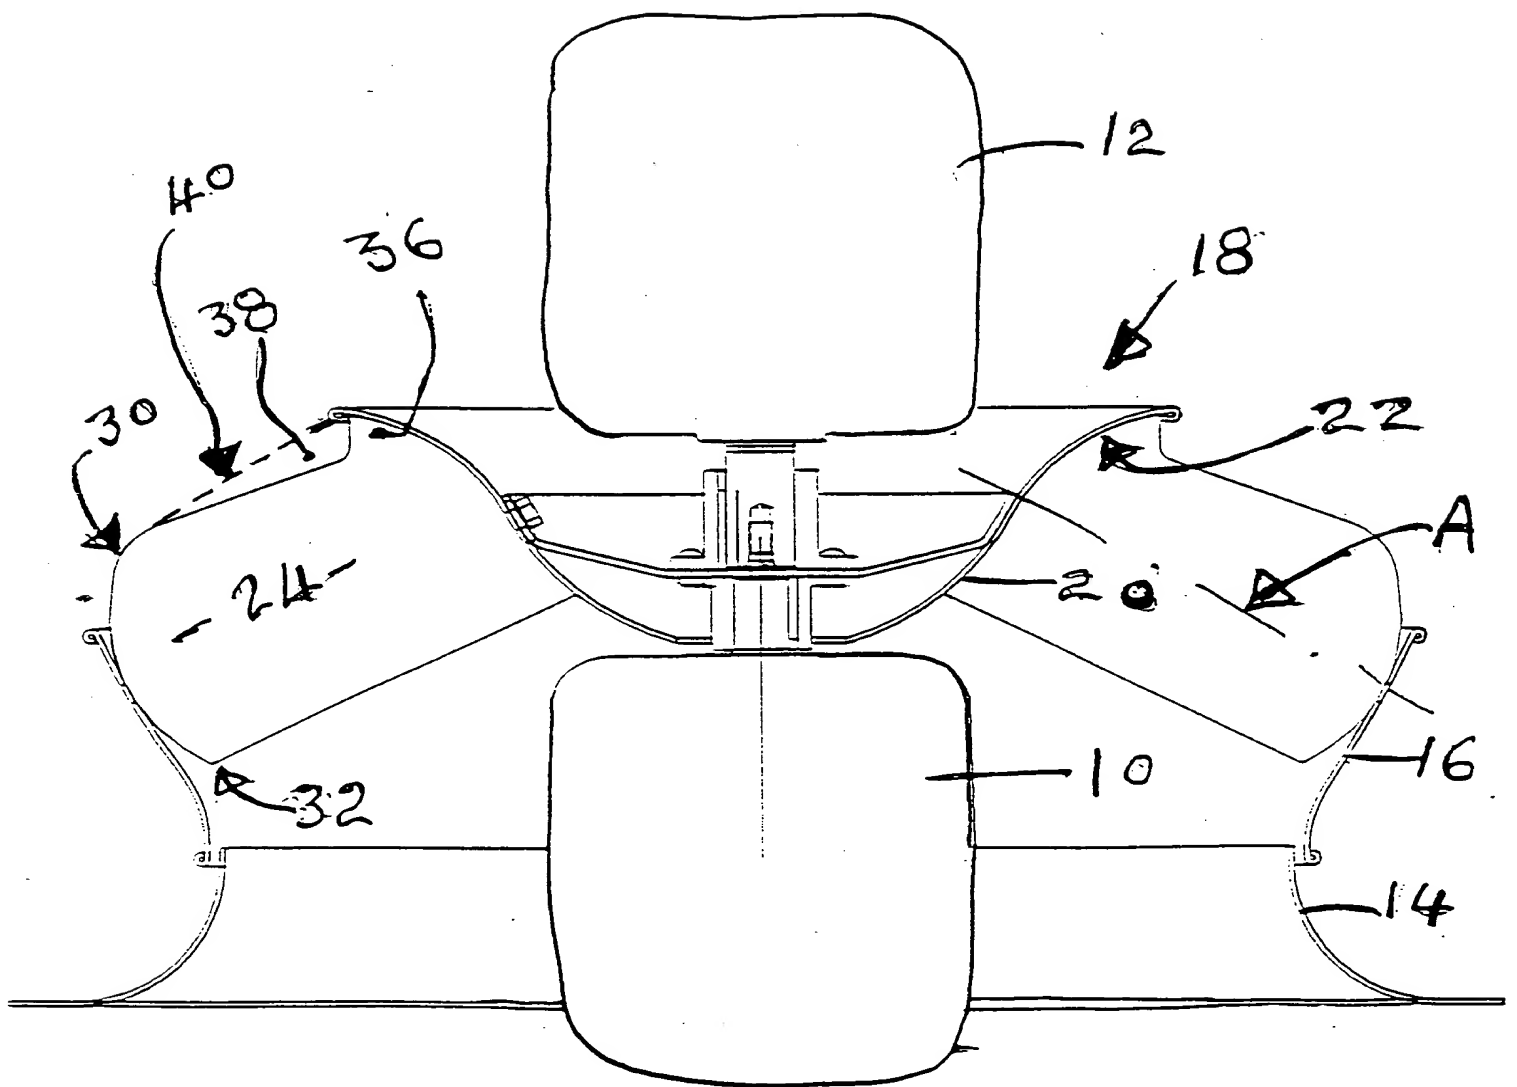

PCT/GB 97 02940

WITHERS - ROBERT

25-11-97

THIS PAGE BLANK (USPTO)